


Pole mount socket HSW 4049

Technical data

Socket	4 pole (3+PE)
	connector as flange
	socket including
	sealing cap
	IP66
Rated voltage	250 V
Rated current	16 A
Degree of protection	IP66
Measurements (L x W x H)	168 x 106 x 110 mm



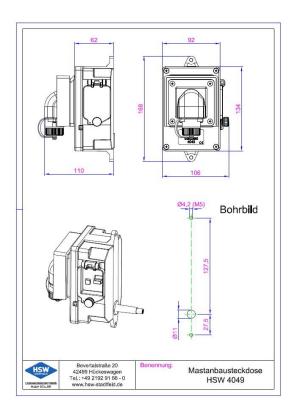

Delivery content

2 drilling screws 4,8 x 22 mm Connection cable

Equipment variants

Residual current circuit breaker (RCCB)

Residual current circuit breaker with overcurrent protection (RCBO)

Connection cable H05VV-F 3 x 1,0 mm 2 in 4.500 mm, 6.000 mm or 8.000 mm lengths

(other lengths on request)